

# SMQ-7501 4K SURVEILLANCE DISPLAY WITH BNC


## FEATURES



- 4K UHD 3840 x 2160 resolution
- Anti-Burn-in™ technology prevents image ghosting
- Image Enhancer: 3D Comb Filter / Deinterlace / Noise Reduction
- Versatile connectivity: HDMI, DVI, VGA, Composite (BNC)
- BNC passive loop-through output port
- RS232/LAN Control - provides compatibility with control systems
- Black-level adjustment for presenting more details in dark images
- Selectable gamma curves optimise different kinds of images
- CCTV picture mode for maximum image detail in low light footage
- Optional blue or black screen when no input signal is detected
- Lockable control keys to prevent tampering in public environments
- Commercial-grade panel for high reliability and long product lifetime
- 24/7 Operation with a rugged metal housing design

The SMQ-7501 is a durable 65-inch 4K surveillance display. The display technology is future-proof and compatible with both analogue and digital surveillance systems. It provides 24/7 nonstop operation in the control rooms. The display supports up to 8MP camera image quality and can present crisp video footage, especially when zooming in the images for further detail checking. This level of image quality promotes more efficient and accurate video surveillance analysis. The SMQ-7501 features AG Neovo patented Anti-Burn-in™ Technology, preventing LCD burn-in during a surveillance operation. The technology also includes PID command & Ctrl software for easy management of multiple displays in security environments.

## TECHNICAL DRAWING

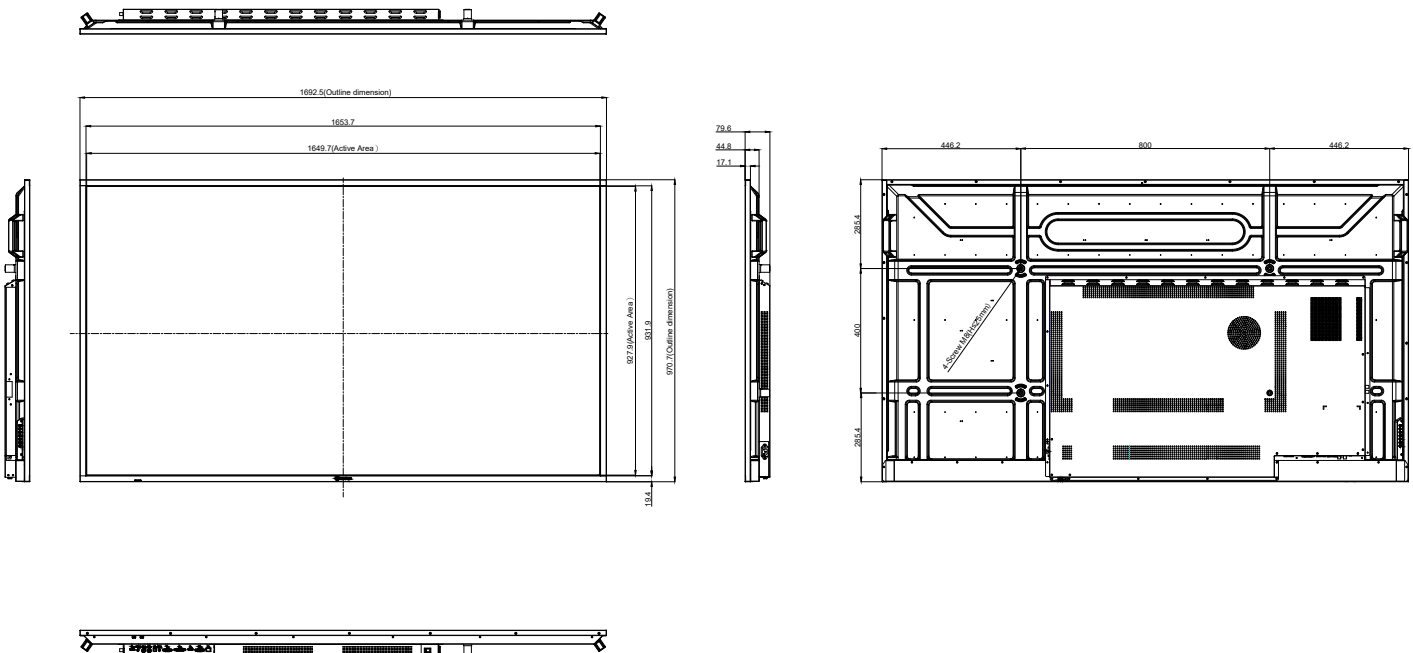

## SPECIFICATIONS

<b>Panel</b>	
Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	75"
Max. Resolution	UHD 3840 x 2160
Pixel Pitch	0.43 mm
Brightness	450 cd/m <sup>2</sup>
Contrast Ratio	1200:1
Viewing Angle (H/V)	178°/178°
Display Colour	1.07B
Response Time	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 1%), 3H Hard Coating
<b>Frequency</b>	
Frequency (H)	31KHz~92KHz
Frequency (V)	48Hz ~ 76Hz
<b>Signal Input</b>	
HDMI	2.0 x 1
DVI	24-Pin DVI-D
VGA	15-Pin D-Sub x 1
Composite	BNC x 1
<b>Signal Output</b>	
Composite	BNC x 1
<b>External Control</b>	
RS232 In	9-Pin D-Sub
LAN	RJ45 x 1
<b>Other Connectivity</b>	
USB	2.0 x 1 (Service Port)
<b>Audio</b>	
Audio In	Stereo Audio Jack (3.5 mm)
Audio Out	Stereo Audio Jack (3.5 mm), S/PDIF
Internal Speakers	15W x 2
<b>Power</b>	
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	240W
Standby Mode	<0.5W
Off Mode	<0.3W
Power Supply	Internal
<b>Operating Conditions</b>	
Temperature	0°C-40°C (32°F-104°F)
Humidity	20%-85% (non-condensing)
<b>Storage Conditions</b>	
Temperature	-10°C-60°C (-4°F-140°F)
Humidity	10%-95% (non-condensing)
<b>Mounting</b>	
VESA FPM/PMI	Yes (600 x 400 mm)
<b>Dimensions</b>	
Product w/o Base (W x H x D)	1692.5 x 970.7 x 79.6 mm (666.3" x 382.2" x 31.3")
Packaging (W x H x D)	1900.0 x 1125.0 x 225.0 mm (748.0" x 442.9" x 88.6")
<b>Weight</b>	
Product w/o Base	38.0 kg (83.78 lb)
Packaging	50.0 kg (110.2 lb)
<b>Regulation Approval</b>	
Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH, EAC, UKCA
<b>Accessories</b>	
Supplied	Power Cord, HDMI Cable, Remote Control, Batteries, Quick Start Guide
<b>Optional Accessories</b>	
Wall Mount (Landscape only)	LMK-03
Floor Mount (Landscape only)	FMC-06

